

CG-2E Heavy Duty Corner Guard

Features:


- Extruded EPDM rubber to RMA tolerances
- Weight: 2.2 lb/ft
- Stock lengths: 4'-0" (1219), 6'-0" (1829), 8'-0" (2438), 10'-0" (3048)

Mounting Options:

- Suggested mounting
 Mechanical hardware:
 Concrete: Masonry anchor 1/4" Flat Head
 Wood: Wood Screw 1/4" Flat Head



Standard Color:

- Black #1

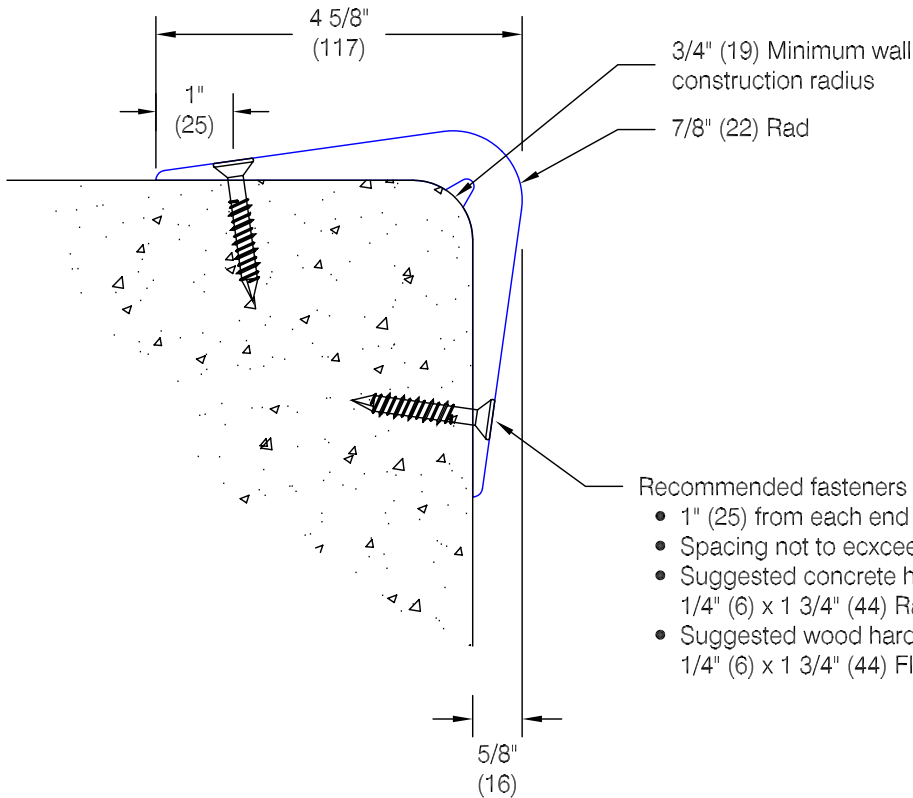

- Recommended fasteners *
- 1" (25) from each end
 - Spacing not to exceed 36" (914) oc
 - Suggested concrete hardware:
 1/4" (6) x 1 3/4" (44) Rawl Flat Head Tapper
 - Suggested wood hardware:
 1/4" (6) x 1 3/4" (44) Flat Head Wood Screw

***Standard corner guard is supplied undrilled and with no mounting hardware.**

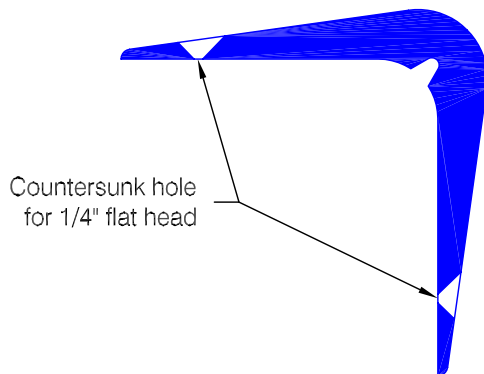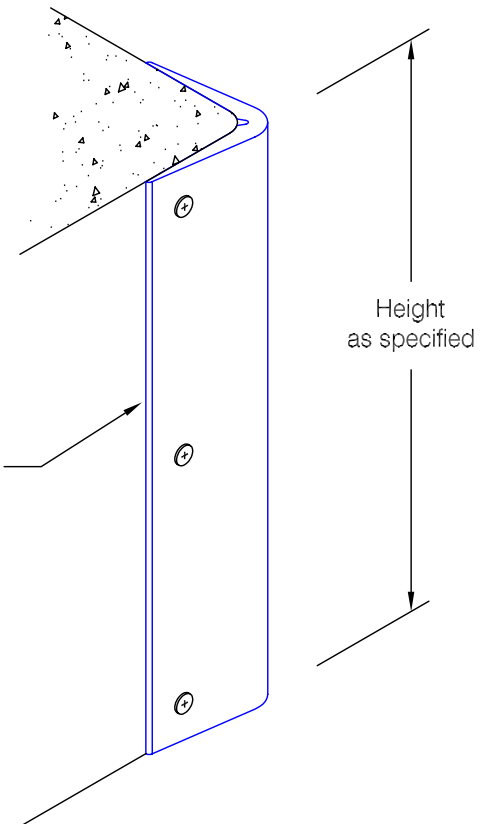

Optional Drilling:

- Standard spacing: 1" (25) from each end and spaced evenly not to exceed 36" (914) oc

Customer :	Project :	CD.100.1b
Architect :	Sales Rep :	